


Hop Oil – Type DRY

❖ Overview

- **Hop Oil – Type DRY** is produced from conventional hop extracts and contains the complete range of essential oils found in them.
- **Hop Oil – Type DRY** can be added at various points in the brewing process (typically on the cold side of production) and results in improved aroma yields compared to traditional hopping techniques. By using **Hop Oil – Type Dry** the so-called “hop creep effect” will NOT occur.
- **Hop Oil – Type DRY** imparts a typical dry-hopped aroma which varies depending on the time of the addition.

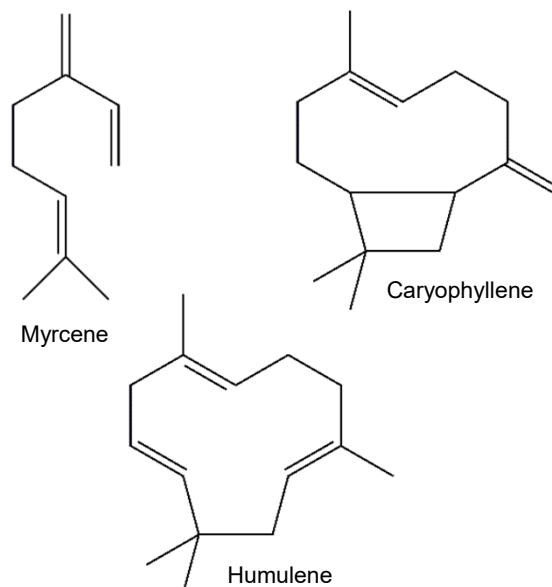

❖ Specifications

- Description: pure hop oil diluted in a blend of propylene glycol and ethanol, resulting in a product diluted to 1:100
- Key compounds:

myrcene	2000 – 6000 ppm
humulene	800 – 2500 ppm
caryophyllene	500 – 1500 ppm
- Bittering substances: not detectable
- Viscosity: approx. 46 mPas at 25 °C (77 °F)
- Density: approx. 1.0 g/ml at 20 °C (68 °F)

For batch-dependent information, please refer to the enclosed certificate of analysis.

❖ Properties

• Appearance

Hop Oil – Type DRY is a nearly colorless to light green, transparent or slightly turbid liquid, containing the complete range of hop essential oils.

• Flavor

Hop Oil – Type DRY can be used to provide a strong hop aroma, or alternatively, a more subtle hop aroma depending on the quantity added as well as the time and point of the addition.

The intensity of the bitterness might increase depending on the quantity added.

During beer aging the aroma components of **Hop Oil – Type DRY** remain mostly stable and contribute to overall flavor stability.

• Utilization

Depending on the time and point of the addition, the recovery rate for certain aroma compounds of the hop oil can be as high as 95 %. Actual utilization will vary from brewery to brewery due to differences in equipment and process conditions.

• Quality

All Hopsteiner® products are processed in facilities which fulfill internationally recognized quality standards.

❖ Packaging

Hop Oil – Type DRY is normally packaged in aluminum bottles of various sizes. The product is supplied as a 1:100 dilution in a blend of 95 % propylene glycol and 5 % ethanol. Other dilutions or pure hop oils may be available on request.

❖ Product Use

• Dosage

The required quantity of **Hop Oil – Type DRY** diluted to 1:100 depends on the point of the addition:

To fermentation: up to 500 g per hl

To maturation: 50 – 300 g per hl

The dosage rates above are intended for orientation only; actual additions will depend on the intensity of the aroma desired.

If **Hop Oil – Type DRY** is used to replace pellets in existing recipes, 65-75% of the total oil content of the pellets will be sufficient to match the required aroma intensity.

• During fermentation: the loss of volatile compounds during fermentation, combined with the biochemical modification of aroma compounds by yeast, can produce a less herbal, more late hopping like aroma.

• During Maturation: additions during maturation will result in slight changes to the hop aroma, also due to a certain remaining yeast activity.

• During filtration: NOT recommended. Please have a look on our [Hop Oil – Type ESSENTIAL](#), a product especially made for this application.

- **Application**

Shake the packaging well before use.

Hop Oil – Type DRY can be added at different stages of beer production. Dosing equipment which pumps the product into the beer stream is preferred for the addition of **Hop Oil – Type DRY**. Alternatively, the hop oil can be added to the tank prior to filling.

- **Storage**

Hop Oil – Type DRY should ideally be stored at temperatures of 1 - 10 °C and in the delivered original container.

- **Best Before Date**

Hop Oil – Type DRY is stable one year from the date it was produced / packaged if stored under the recommended conditions. Once opened, it is recommended to use within one month and limit the number of openings.

- **Safety**

Any product coming into contact with the skin should be immediately washed off with soap and water. If **Hop Oil – Type DRY** gets into the eyes, flush with copious amounts of water until clear and seek medical attention. For full safety information, please refer to the relevant Hopsteiner® safety data sheet.

❖ Analytical Methods

- **Aroma Compounds**

Individual hop oil compounds can be analyzed by means of gas chromatography techniques using the following methods:

- Analytica-EBC 7.12
- ASBC Hops-17

❖ Technical Support

We are pleased to offer assistance and advice on the full range of Hopsteiner® products:

- Safety Data Sheets (SDS)
- assistance with pilot or full-scale brewing trials
- special analytical services

Disclaimer: The information provided in this document is believed to be correct and valid. However, Hopsteiner® does not guarantee that the information provided here is complete or accurate and thus assumes no liability for any consequences resulting from its application.